

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 919 213 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
02.06.1999 Bulletin 1999/22

(51) Int Cl.⁶: **A61F 13/15**

(21) Application number: **98309688.4**

(22) Date of filing: **25.11.1998**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: **28.11.1997 JP 328220/97**

(71) Applicant: **UNI-CHARM CORPORATION**
Kawanoe-shi Ehime-ken (JP)


(72) Inventors:
• **Inoue, Yasushi, c/o Research & Dev. Division
Mitoyo-gun, Kagawa-ken 769-1602 (JP)**
• **Otsubo, Toshifumi, c/o Research & Dev. Division
Mitoyo-gun, Kagawa-ken 769-1602 (JP)**
• **Shimoe, Nariaki, c/o Research & Dev. Division
Mitoyo-gun, Kagawa-ken 769-1602 (JP)**

(74) Representative: **Parry, Christopher Stephen
Saunders & Dolleymore,
9 Rickmansworth Road
Watford, Herts. WD1 7HE (GB)**

(54) **Disposable training pants**

(57) Training pants (1) having a front region, a rear region and a crotch region therebetween includes a liquid-permeable topsheet, a liquid-impermeable backsheet and an absorbent core disposed therebetween, and the topsheet has a liquid-permeability lower in a transversely middle zone of the crotch region than in transversely opposite side zones, and thereby the pants can give a wearer a feeling of wetness even if the pants have slipped down.

FIG.2

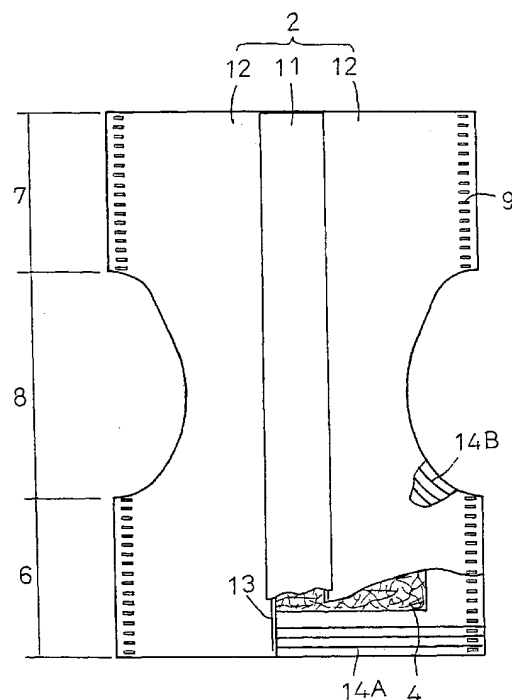

EP 0 919 213 A2

Description

[0001] This invention relates to training pants for infants.

[0002] The training pants of this type are well known, for example, from Japanese Utility Model Application Disclosure Gazette (Kokai) No. Hei7-33916, which includes a wetness sensitive sheet provided on an inner surface of the pants in the middle of its crotch region. The sheet has a high water retaining capacity and adapted to give a wearer discomfortable feeling of wetness upon absorption of urine. The wetness sensitive sheet elastically contracts longitudinally of the crotch region and thereby normally biased to be brought in contact with the wearer's crotch region. Therefore, the wetness sensitive sheet reliably functions to give the wearer a feeling of wetness even if urine is discharged on the pants with its crotch region being not in close contact with the wearer's crotch region.

[0003] In the above-mentioned training pants, the wetness sensitive sheet will not be brought in contact with the wearer's crotch region even when the wetness sensitive sheet contracts, so long as the pants have slipped down and the wetness sensitive sheet has been spaced from the wearer's crotch region beyond a limited distance.

[0004] In view of the above problem, it is an object of the invention to provide training pants so improved to achieve its desired training effect even when the pants have slipped down.

[0005] According to the invention, there are provide training pants having a front region, a rear region and a crotch region therebetween, the pants comprising a liquid-permeable topsheet, a liquid-impermeable backsheet and a liquid-absorbent core disposed therebetween, a waist-opening and a pair of leg-openings, the openings being respectively provided with elastic members adapted to be stretchable/contractile circumferentially of the respective openings, wherein: of the front and rear waist regions and the crotch region, at least the crotch region is partially composed so that the topsheet has a liquid-permeability which is lower in a transversely middle zone than in transversely opposite side zones of the crotch region.

[0006] According to another aspect of the invention, the transversely middle zone of the crotch region has a width in a range of 20 ~ 70 mm and the liquid-permeability of the topsheet depends on a total aperture area ratio of plural liquid-permeable apertures formed in the topsheet occupying a total area of the topsheet wherein the total aperture area ratio is in a range of 0 ~ 20 % in the middle zone and in a range of 5 ~ 50 % in the transversely opposite side zones, i.e., the total aperture area ratio is higher in the transversely opposite side zones than in the transversely middle zone by 5 %.

[0007] According to still another aspect of the invention, the transversely middle zone of the crotch region has a width in a range of 20 ~ 70 mm and the trans-

versely middle zone of the topsheet is made of a liquid-impermeable nonwoven fabric or a liquid-impermeable plastic sheet while the transversely opposite the zones of the topsheet are made of a liquid-permeable nonwoven fabric or a liquid-permeable apertured plastic sheet.

[0008] According to further another aspect of the invention, the total aperture area ratio gradually varies between the transversely middle zone and the transversely opposite side zones.

[0009] Embodiments of the invention are described below with reference to the accompanying drawings, in which*

Fig. 1 is a perspective view showing training pants according to the invention as partially broken away; Fig. 2 is a plan view showing the training pants with front and rear waist regions being separated from each other along transversely opposite side edges and longitudinally unfolded, as partially broken away; and

Fig. 3 is a view similar to Fig. 2 showing another embodiment.

[0010] Specific modes in which the invention may be exploited will be described in details in reference with the accompanying drawings.

[0011] Training pants 1 shown by Fig. 1 in a perspective view as partially broken away comprises a liquid-permeable topsheet 2, a liquid-impermeable backsheet 3 and an hourglass-shaped liquid-absorbent core 4 disposed between the two sheets 2, 3 so as to define longitudinally a front waist region 6, a rear waist region 7 and a crotch region 8 extending between the front and rear waist regions 6, 7. The front and rear waist regions 6, 7 are placed upon each other along transversely opposite side edges and joined together at vertically arranged intermittent spots 9 along the respective side edges so as to define a waist-opening 11 and a pair of leg-openings 12. The waist-opening 11 is provided along their peripheral edge with a plurality of elastic members 14A and each of the leg-openings 12 is also provided along their peripheral edges with a plurality of elastic members 14B. These elastic members 14A, 14B circumferentially extend between the topsheet 2 and the backsheet 3 and are secured under appropriate tensions to an inner surface of at least one of the topsheet 2 and the backsheet 3.

[0012] Fig. 2 is a plan view showing the training pants 1 with the front and rear waist regions 6, 7 being separated from each other at the joined spots 9 unfolded in a direction X as well as in a direction Y, as partially broken away. As shown, the topsheet 2 comprises a middle sheet 11 occupying a transversely middle zone of the pants 1 and longitudinally extending between respective ends of the front and rear waist regions 6, 7 inclusively of the crotch region 8, and a pair of lateral sheets 12 adjacent respective side edges of the middle sheet 11 and extending therefrom to the respective outermost

side edges of the front and rear waist regions 6, 7 and the crotch region 8. The middle sheet 11 and the respective side lateral sheets 12 overlap one another along their adjacent side edges and joined one to another by longitudinal lines 13 of hot melt adhesive.

[0013] The middle sheet 11 of the topsheet 2 covers the core 4 over a range of 20 ~ 70 mm as measured transversely of the pants 1. The remainder of the core 4 is covered with the lateral sheets 12. The middle sheet 11 may be liquid-impermeable or liquid-permeable and, in the latter case, the middle sheet 11 may have a plurality of first apertures each having a diameter of 0.1 ~ 3 mm wetness sensitive means 2 at the maximum total aperture ratio of 20 %. The lateral sheets 12 are liquid-permeable and may have a plurality of second apertures each having a diameter of 0.3 ~ 5 mm at a total aperture area ratio of 5 ~ 50 % with respect to the lateral sheets 12. The lateral sheets 12 should have a total aperture area ratio higher than that of the middle sheet 11 so that these lateral sheets 12 may have a liquid-permeability higher than the middle sheet 11.

[0014] With the training pants of the arrangement as described above, an amount of urine discharged thereon is scarcely absorbed in the transversely middle zone of the pants 1 but most of such discharged urine flows on the topsheet 1 towards the transversely opposite side edges of the crotch region 8 and then is absorbed by the core 4 through the lateral sheets 12. With the pants 1 of the invention, accordingly, most of discharged urine is collected in the side edges of the crotch region 8, which are normally maintained in close contact with the wearer's legs under the effect of the elastic members 14B and gives the wearer a distinct feeling of wetness. Adjacent these side edges, the core 4 also is indirectly in contact with the wearer's skin through the lateral sheets 12 and the core 4 having absorbed the amount of discharged urine reliably gives the wearer the distinct feeling of wetness for a long period.

[0015] The training pants according to the invention gives the wearer the feeling of wetness in such a manner and therefore can achieve the desired training effect even when the pants have slipped down to be clearly spaced from the wearer's crotch region.

[0016] Fig. 3 is a view similar to Fig. 2, showing an alternative embodiment of the invention. In training pants 1 shown, the middle sheet 11 is of a relatively small size and provided at a transversely middle location of the crotch region 8 rather adjacent the front waist region 6 at which most of urine will be discharged onto the training pants 1. An inner surface of the pants 1 not covered with the middle sheet 11 is covered with the topsheet 16. Liquid-permeability of the middle sheet 11 is similar to that in the case shown in Fig. 2. The sheet 11 has a width of 20 ~ 70 mm and a length of at least 40 mm as measured longitudinally of the pants 1. Liquid-permeability of the topsheet is similar to that of the side sheets 12 in the case shown in Fig. 2. It should be understood that such liquid-permeability of the sheet 16

may be adjusted so as to be progressively enhanced from the middle to the transversely opposite sides.

[0017] According to the invention, the middle sheet 11 may be formed by a liquid-impermeable plastic sheet, a liquid-permeable apertured plastic sheet, or a liquid-impermeable or permeable nonwoven fabric. Liquid-permeability of a nonwoven fabric, if it is employed, may be controlled not only by selecting size of each aperture or total aperture area ratio but also by adjusting a basis weight and density of a nonwoven fabric to be used. The side sheets 12 as well as the topsheet 16 also may be formed by a liquid-permeable apertured plastic sheet or a liquid-permeable nonwoven fabric. Liquid-permeability of such nonwoven fabric also may be controlled by adjusting the aperture size, total aperture area ratio, a basis weight and density of the nonwoven fabric. Liquid-permeability of the middle sheet 11, the side sheets 12 and the topsheet 16 may be controlled also by pretreating these sheets so as to make them hydrophilic or hydrophobic.

[0018] It is also possible without departing the scope of the invention to cover the entire inner surface of the pants 1 with a single liquid-permeable sheet and then to place the middle sheet 11 upon the single liquid-permeable sheet in the transversely middle zone of the single sheet. However, such arrangement will inevitably lead to wasteful consumption of the sheet material.

[0019] It is also possible within the scope of the invention to cover the entire inner surface of the pants 1 with a single sheet which has a liquid-permeability progressively enhanced from the middle zone to the transversely opposite sides of the pants 1.

[0020] The training pants according to the invention is characterized by an arrangement such that the transversely opposite side zones may be maintained in close contact with the wearer's skin and most of discharged urine may be collected in these zones before absorbed into the core. Accordingly, the pants can give the wearer a feeling of wetness even if the pants have slipped down and thereby achieve its desired effect. Flow of urine from the middle zone toward the transversely opposite side zones of the crotch region can already given the wearer a discomfortable feeling and the desired effect of the training pants can be additionally achieved in this manner.

Claims

1. Training pants having a front region, a rear region and a crotch region therebetween, said pants comprising a liquid-permeable topsheet, a liquid-impermeable backsheet and a liquid-absorbent core disposed therebetween, a waist-opening and a pair of leg-openings, said openings being respectively provided with elastic members adapted to be stretchable/contractile circumferentially of the respective openings, wherein:

of said front and rear waist regions and said crotch region, at least said crotch region is partially composed so that said topsheet may have a liquid-permeability which is lower in a transversely middle zone than in transversely opposite side zones of said crotch region. 5

2. Training pants according to Claim 1, wherein said transversely middle zone of said crotch region has a width in a range of 20 ~ 70 mm and said liquid-permeability of the topsheet depends on a total aperture area ratio of plural liquid-permeable apertures formed in said topsheet occupying a total area of said topsheet wherein said total aperture area ratio is in a range of 0 ~ 20 % in said transversely middle zone and in a range of 5 ~ 50 % in said transversely opposite side zones, i.e., said total aperture area ratio is higher in said transversely opposite side zones than in said transversely middle zone by 5 %. 10 15 20
3. Training pants according to Claim 1, wherein said transversely middle zone of said crotch region has a width in a range of 20 ~ 70 mm and said transversely middle zone of said topsheet is made of a liquid-impermeable nonwoven fabric or a liquid-impermeable plastic sheet while said transversely opposite side zones of said topsheet are made of a liquid-permeable nonwoven fabric or a liquid-permeable apertured plastic sheet. 25 30
4. Training pants according to Claim 2, wherein said total aperture area ratio gradually varies between said transversely middle zone and said transversely opposite side zones. 35

40

45

50

55

FIG. 1

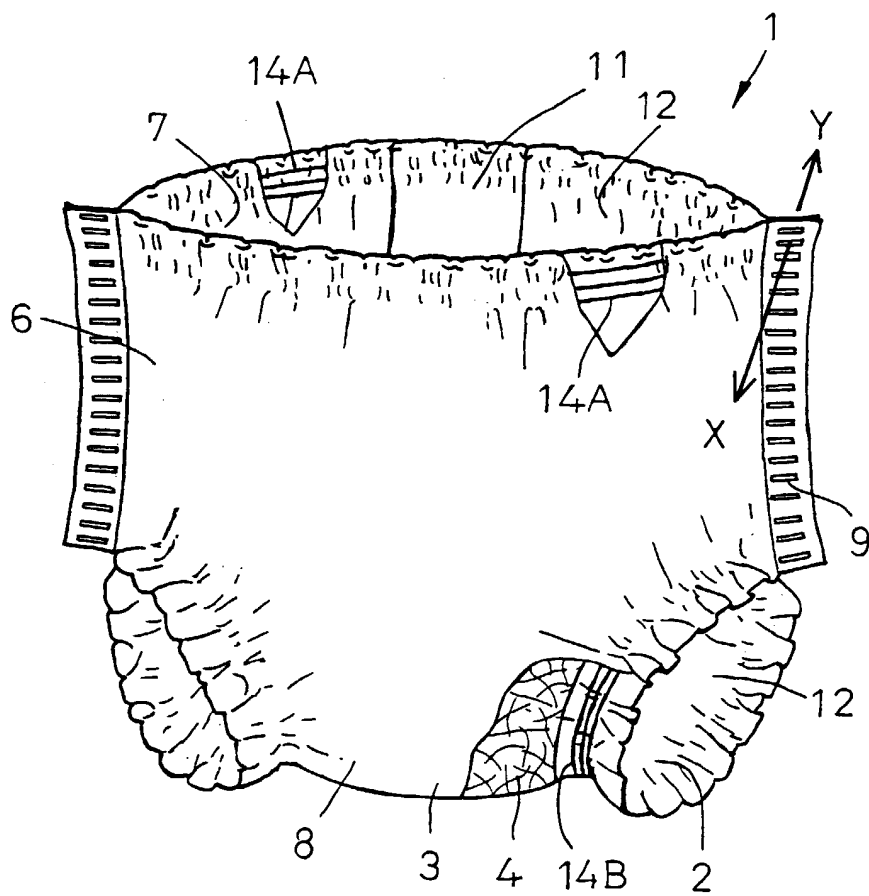


FIG.2



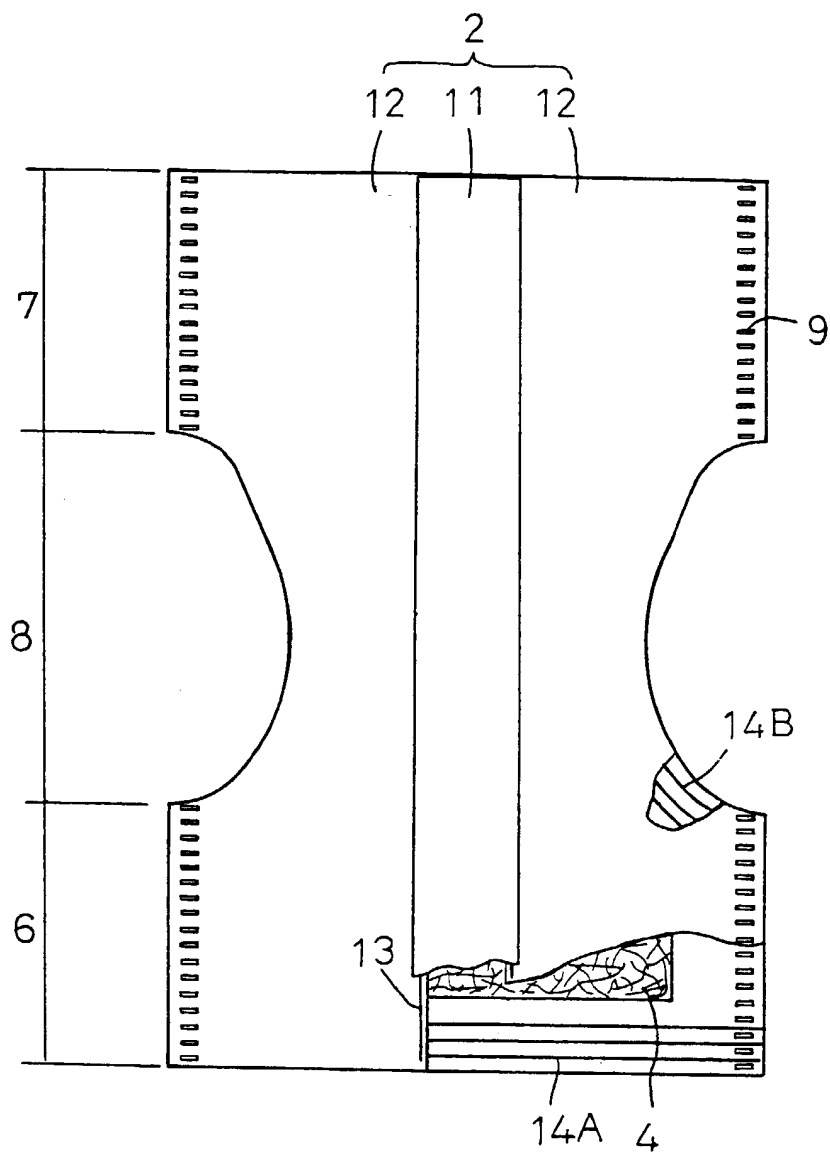


FIG.3

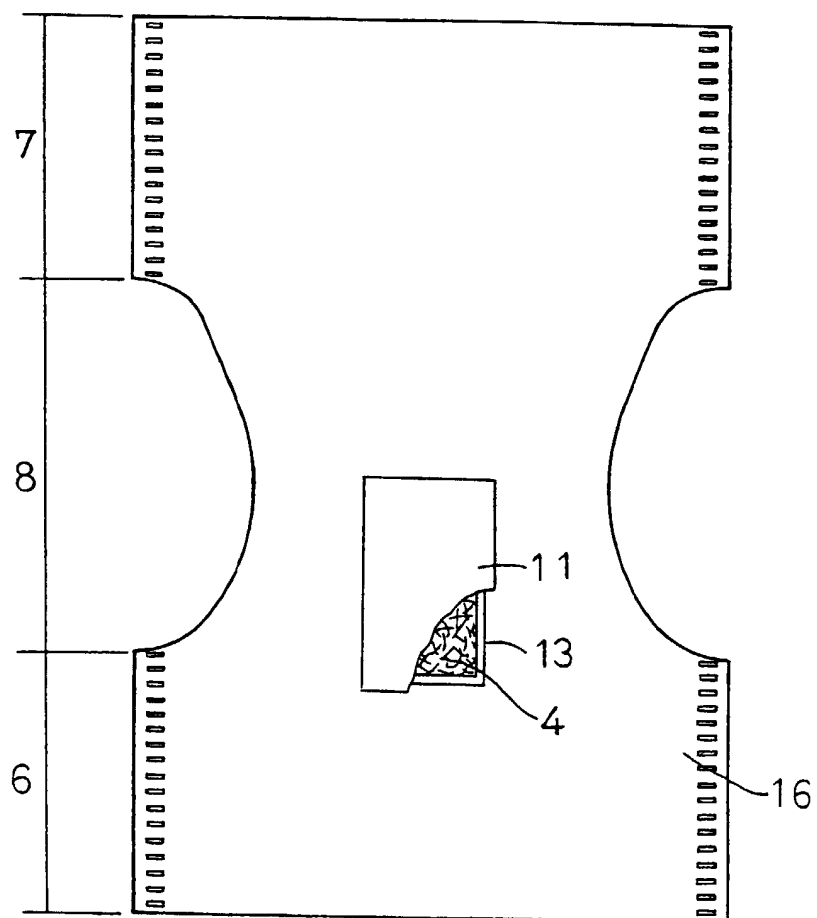



(11)

EP 0 919 213 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
25.04.2001 Bulletin 2001/17

(51) Int Cl.⁷: **A61F 13/15, A61F 13/42**

(43) Date of publication A2:
02.06.1999 Bulletin 1999/22

(21) Application number: **98309688.4**

(22) Date of filing: **25.11.1998**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: **28.11.1997 JP 32822097**

(71) Applicant: **UNI-CHARM CORPORATION**
Kawanoe-shi Ehime-ken (JP)


(72) Inventors:
• **Inoue, Yasushi, c/o Research & Dev. Division
Mitoyo-gun, Kagawa-ken 769-1602 (JP)**
• **Otsubo, Toshifumi, c/o Research & Dev. Division
Mitoyo-gun, Kagawa-ken 769-1602 (JP)**
• **Shimoe, Nariaki, c/o Research & Dev. Division
Mitoyo-gun, Kagawa-ken 769-1602 (JP)**

(74) Representative: **Parry, Christopher Stephen
Saunders & Dolleymore,
9 Rickmansworth Road
Watford, Herts. WD18 0JU (GB)**

(54) **Disposable training pants**

(57) Training pants (1) having a front region, a rear region and a crotch region therebetween includes a liquid-permeable topsheet, a liquid-impermeable backsheet and an absorbent core disposed therebetween, and the topsheet has a liquid-permeability lower in a transversely middle zone of the crotch region than in transversely opposite side zones, and thereby the pants can give a wearer a feeling of wetness even if the pants have slipped down.

FIG.2

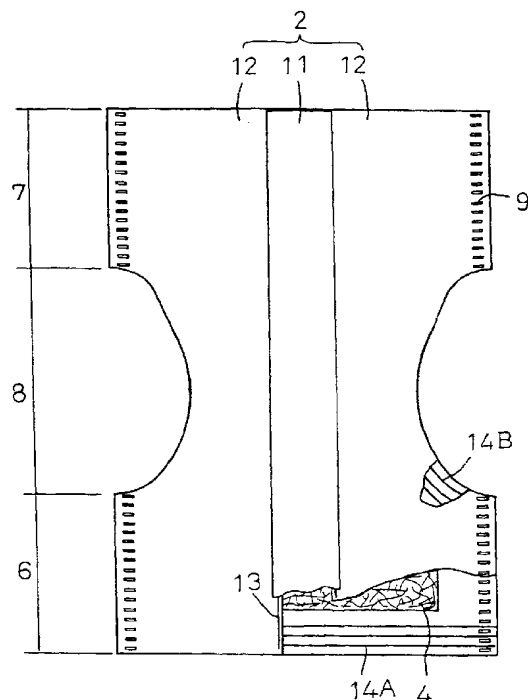



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 98 30 9688

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	WO 93 16670 A (MCNEIL PPC INC) 2 September 1993 (1993-09-02) * page 13, line 4 - page 16, line 10; claims; figures *	1,2	A61F13/15 A61F13/42
X	EP 0 615 738 A (UNI CHARM CORP) 21 September 1994 (1994-09-21) * the whole document *	1	
X	PATENT ABSTRACTS OF JAPAN vol. 015, no. 440 (C-0883), 11 November 1991 (1991-11-11) & JP 03 186261 A (DAIO PAPER CORP), 14 August 1991 (1991-08-14) * abstract *	1,2	
P,X	EP 0 861 645 A (UNI CHARM CORP) 2 September 1998 (1998-09-02) * the whole document *	1-3	
X	EP 0 626 160 A (JAPAN ABSORBENT TECHNOLOGY INS) 30 November 1994 (1994-11-30) * claims; figures *	1,2	TECHNICAL FIELDS SEARCHED (Int.Cl.6) A61F
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 28 February 2001	Examiner Douskas, K
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 98 30 9688

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

28-02-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9316670 A	02-09-1993	JP 3018304 B	13-03-2000
		JP 5228176 A	07-09-1993
		AU 3727693 A	13-09-1993
EP 0615738 A	21-09-1994	JP 6233793 A	23-08-1994
		AU 674365 B	19-12-1996
		AU 5485794 A	18-08-1994
		CA 2115206 A,C	13-08-1994
		CN 1092280 A	21-09-1994
		DE 69409859 D	04-06-1998
		DE 69409859 T	03-09-1998
		ES 2115859 T	01-07-1998
		GB 2275058 A,B	17-08-1994
		KR 254296 B	01-05-2000
		US 5743776 A	28-04-1998
JP 03186261 A	14-08-1991	NONE	
EP 0861645 A	02-09-1998	JP 10234778 A	08-09-1998
		CN 1195506 A	14-10-1998
		SG 71086 A	21-03-2000
EP 0626160 A	30-11-1994	JP 2757931 B	25-05-1998
		JP 6327715 A	29-11-1994
		CA 2117288 A	27-11-1994
		DE 69408033 D	26-02-1998
		DE 69408033 T	20-08-1998
		ES 2112445 T	01-04-1998
		KR 199513 B	15-06-1999

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82